




## System Diagram





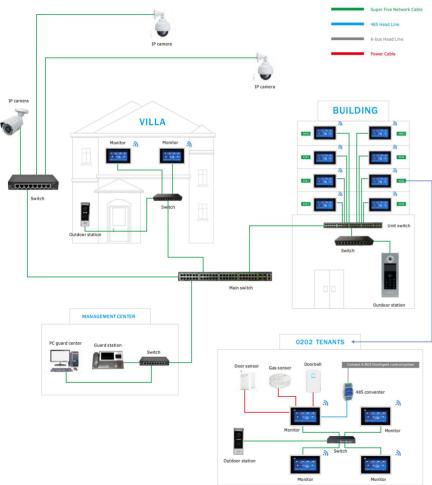



Panoramic Camera 4K Action Camera | Car Camer Battery Cameras WiFi Door Bells Hidden Cameras





PIXELS CONNECT PTE LTD

# Fingerprint | Face | Card | Access PIN Reader Electromagnetic Lock Exit Button | Break Glass Video Door Intercom

#### PIXELS CONNECT PTE LTD

1013, Geylang East Ave 3, #01-144 Singapore 389728
pixelsconnect@gmail.com | www.pixelsconnect.com.sg | Tel:+65 6440 0023

## TCP/IP Video Door Phone System

**Working with Mobile Phone Anywhere** 

## **Features**

TCP/IP system for villa, house, office, multi apartments

FREE APP supports both IOS and Android mobile phone

Use CAT5/CAT6 cable, easy for wiring.

Support POE function, use standard POE switch.

Support 8 alarm zones(smoke, gas, etc).

Dual way communication, support intercom between monitors.

High resolution IP camera and screen.

Auto snapshot and video record, video and audio message, motion detection.

## **System Funciton**





























- Multi-language built-in UI OS
- Touch screen
- APP remote control
- Motion detection
- Auto snapshot & video record
- Video & audio message
- Support IP camera
- Do not disturb

## **Specification**

- 10" TFT screen with 1024\*600 resolution
- Touch screen, metal drawing panel, silver/gold color
- Hands-free dual intercom
- Support max.32G SD card
- Point to point intercom
- Different ringtonge volume for day and night
- POE/external power (DC12V, 1A)
- Working current≤500mA
- Working temperature: -10°C—+60°C

## **Dimension**



#### Feature

- Multi-language built-in UI OS
- Touch screen
- APP remote control
- Motion detection
- Auto snapshot & video record
- Video & audio message
- Support IP camera
- Do not disturb

## **Specification**

- 10" TFT screen with 1024\*600 resolution
- Touch screen, metal drawing panel, silver/gold color
- Hands-free dual intercom
- Support max.32G SD card
- Point to point intercom
- Different ringtonge volume for day and night
- POE/external power (DC12V, 1A)
- Working current≤500mA
- Working temperature: -10°C—+60°C

#### **Dimension**












- Multi-language built-in UI OS
- Touch screen
- APP remote control
- Motion detection
- Auto snapshot & video record
- Video & audio message
- Support IP camera
- Do not disturb

## **Specification**

- 7" TFT screen with 1024\*600 resolution
- Touch screen, metal drawing panel, silver/gold color
- Hands-free dual intercom
- Support max.32G SD card
- Point to point intercom
- Different ringtonge volume for day and night
- POE/external power (DC12V, 1A)
- Working current≤400mA
- Working temperature: -10°C—+60°C

## **Dimension**



#### Feature

- Multi-language built-in UI OS
- Touch screen
- APP remote control
- Motion detection
- Auto snapshot & video record
- Video & audio message
- Support IP camera
- Do not disturb

## **Specification**

- 7" TFT screen with 1024\*600 resolution
- Touch screen, metal drawing panel, silver/gold color
- Hands-free dual intercom
- Support max.32G SD card
- Point to point intercom
- Different ringtonge volume for day and night
- POE/external power (DC12V, 1A)
- Working current≤400mA
- Working temperature: -10°C—+60°C

#### **Dimension**











- Multi-language built-in UI OS
- Touch screen
- APP remote control
- Motion detection
- Auto snapshot & video record
- Video & audio message
- Support IP camera
- Do not disturb

## **Specification**

- 7" TFT screen with 1024\*600 resolution
- Touch screen, metal drawing panel, silver/gold color
- Hands-free dual intercom
- Support max.32G SD card
- Point to point intercom
- Different ringtonge volume for day and night
- POE/external power (DC12V, 1A)
- Working current≤400mA
- Working temperature: -10°C—+60°C

## **Dimension**



#### Feature

- Multi-language built-in UI OS
- Touch screen
- APP remote control
- Motion detection
- Auto snapshot & video record
- Video & audio message
- Support IP camera
- Do not disturb

## Specification

- 7" TFT screen with 1024\*600 resolution
- Touch screen, metal drawing panel, silver/gold color
- Hands-free dual intercom
- Support max.32G SD card
- Point to point intercom
- Different ringtonge volume for day and night
- POE/external power (DC12V, 1A)
- Working current≤400mA
- Working temperature: -10°C—+60°C

#### **Dimension**



-5-









- Multi-language built-in UI OS
- Touch screen
- APP remote control
- Motion detection
- Auto snapshot & video record
- Video & audio message
- Support IP camera
- Do not disturb

## **Specification**

- 7" TFT screen with 1024\*600 resolution
- Touch screen, acrylic panel, white/black color
- Hands-free dual intercom
- Support max.32G SD card
- Point to point intercom
- Different ringtonge volume for day and night
- POE/external power (DC12V, 1A)
- Working current≤400mA
- Working temperature: -10°C—+60°C

## Dimension




#### Feature


- 1.0Mega IP camera
- LED light for night vision
- Unlock door
- Waterproof IP65
- Easy to install

## **Specification**

- 1.0Mega IP camera
- Wide angle camera 110°
- Metal main part and acrylic front panel, silver color
- Surface mounted
- Voice remind
- LED for night vision
- 45° angle bracket & rain cover included
- Waterproof IP65
- POE/external power (DC 12V, 1A)
- Working current≤200mA
- Working temperaturer: -40°C−+50°C

## **Dimension**





-7-




















## **Specification**

- 1.0Mega IP camera
- Wide angle camera 110°
- Aluminum panel, silver/golden/black/dark blue color
- Surface mounted/flush mounted
- Support 1/2/3/4 apartments
- Voice remind
- LED for night vision
- Waterproof IP65
- With POE function
- Working current≤200mA
- Working temperaturer: -40°C—+50°C

#### Dimension



#### Feature











## **Specification**

- 1.0Mega IP camera
- Wide angle camera 110°
- Metal main part and acrylic front panel, silver color
- Surface mounted/flush mounted
- Voice remind
- LED for night vision
- Waterproof IP65
- With POE function
- Working current≤200mA
- Working temperaturer: -40°C—+50°C

#### Dimension





-9-



















## **Specification**

- 1.0Mega IP camera
- Wide angle camera 110°
- Metal main part and acrylic front panel, silver color
- Surface mounted/flush mounted
- Voice remind
- With IC card unlock function
- With touch keypad for passwords unlock
- LED for night vision
- Waterproof IP65
- With POE function
- Working current≤200mA
- Working temperaturer: -40°C—+50°C

#### Dimension



#### Feature












## **Specification**

- 1.0Mega IP camera
- Wide angle camera 110°
- Metal main part and acrylic front panel, silver color
- Surface mounted/flush mounted
- Voice remind
- With IC card unlock function
- With manual keypad for passwords unlock
- LED for night vision
- Waterproof IP65
- With POE function
- Working current≤200mA
- Working temperaturer: -40°C—+50°C

## **Dimension**





-11-










- 1.0Mega IP camera
- LED light for night vision
- Unlock door
- Waterproof IP65
- Easy to install

## **Specification**

- 1.0Mega IP camera
- Wide angle camera 75°
- Metal body, silver color
- Voice remind
- With IC card unlock function
- With manual keypad for passwords unlock
- Support max.9999 apartments
- LED for night vision
- Waterproof IP53
- With POE function
- Working current≤200mA
- Working temperaturer: -40°C—+50°C

## Dimension



#### Feature

- 1.0Mega IP camera
- LED light for night vision
- Unlock door
- Waterproof IP65
- Easy to install

## **Specification**

- 1.0Mega IP camera
- Wide angle camera 75°
- Metal body, silver color
- Voice remind
- With IC card unlock function
- With touch keypad for passwords unlock
- Support max.9999 apartments
- LED for night vision
- Waterproof IP53
- With POE function
- Working current≤200mA
- Working temperaturer: -40°C—+50°C

## **Dimension**



-13-