



## PIXELS CONNECT PTE LTD



### ◆ SPECIFICATION

Model NO.	PIX-PCKBBB60HTC800FKP	PIX-PCKBBB60HTC800ESL	PIX-PCKBBB60HTC800ES	PIX-PCKBBB60HTC800FKE
Video Output Mode	AHD/TVI:8M@15fps, 5M@20fps/12.5fps, 4M/2M@30fps/25fps; CVI: 8M@15fps/12.5fps, 4M/2M@30fps/25fps	AHD: 8M@15fps, 5M@20fps/12.5fps, 4M/2M@30fps/25fps; CVI:8M@15fps/12.5fps, 4M/2M@30fps/25fps; TVI: 8M@15fps/12.5fps, 5M@20fps/12.5fps, 4M/2M@30fps/25fps	AHD/TVI/CVI: 8M@15fps/12.5fps, 4M/2M@30fps/25fps	AHD: 8M@15fps, 5M@20fps/12.5fps, 4M/2M@30fps/25fps; TVI/CVI: 8M@15fps/12.5fps, 5M@20fps/12.5fps 4M/2M@30fps/25fps

### Camera

Image Sensor	1/2.5" CMOS sensor	1/2.8" SONY Starvis Back-illuminated CMOS sensor	1/2.8" SONY CMOS sensor	1/2.5" CMOS sensor
Image Resolution	8M:3840*2160 5M:2592*1944 4M:2560*1440 2M:1920*1080	8M:3840*2160 5M:2592*1944 4M:2560*1440 2M:1920*1080	8M:3840*2160 4M:2560*1440 2M:1920*1080	8M:3840*2160 5M:2592*1944 4M:2560*1440 2M:1920*1080
TV System	PAL/NTSC	PAL/NTSC	PAL/NTSC	PAL/NTSC
Electronic Shutter	Auto	Auto	Auto	Auto
Scanning System	Progressive Scan	Progressive Scan	Progressive Scan	Progressive Scan

### Lens

Focus Length	Board Lens 6mm	Board Lens 6mm	Board Lens 3.6mm	Board Lens 3.6mm
Focus Control	Fixed	Fixed	Fixed	Fixed
Lens Type	Fixed	Fixed	Fixed	Fixed

### Night Vision

IR Cut Filter	YES	YES	YES	YES
Infrared LED	42μ x4PCS	42μ x4PCS	42μ x4PCS	42μ x4PCS
Infrared Distance	40M	40M	40M	40M
IR Status	AGC Auto Control	AGC Auto Control	AGC Auto Control	AGC Auto Control

### Camera Features



Starlight	/	/	/	/
-----------	---	---	---	---

Day/Night	YES	YES	YES	YES/NO
OSD Menu Language	YES	YES	YES	YES
WDR	DWDR	YES	YES	DWDR
UTC	YES	YES	YES	YES
Noise Reduction	3DNR	3DNR	3DNR	DNR
Coaxial Audio	/	/	/	YES(only TVI )
White Balance	AUTO / MANUAL	AUTO / MANUAL	AUTO / MANUAL	AUTO / MANUAL
Gain Control	AUTO	AUTO	AUTO	AUTO

## General

Housing	IP67	IP67	IP67	IP67
Bracket	YES	YES	YES	YES
Operation Temperature	-10°C ~ +60°C RH95% Max	-10°C ~ +60°C RH95% Max	-10°C ~ +60°C RH95% Max	-10°C ~ +60°C RH95% Max
Storage Temperature	-20°C ~ +60°C RH95% Max	-20°C ~ +60°C RH95% Max	-20°C ~ +60°C RH95% Max	-20°C ~ +60°C RH95% Max
Power Source	DC12V±10%,750mA	DC12V±10%,750mA	DC12V±10%,750mA	DC12V±10%,750mA
Dimension	220(W) x 105(H) x 109(D)mm	220(W) x 105(H) x 109(D)mm	220(W) x 105(H) x 109(D)mm	220(W) x 105(H) x 109(D)mm
Weight	2.15Kgs (With bracket)	2.15Kgs (With bracket)	2.15Kgs (With bracket)	2.15Kgs (With bracket)

Made In Taiwan

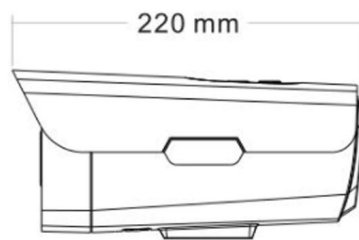

**CCTV**

Analog Camera, IP Camera  
Dome & Bullet Cameras  
Hidden Cameras  
4K Cameras  
PTZ Cameras



**Wireless  
Cameras**

Panoramic Camera  
4K Action Camera | Car Cameras  
Battery Cameras  
WiFi Door Bells  
Hidden Cameras



**Biometric  
Devices**

Fingerprint | Face | Card |  
Access PIN Reader  
Electromagnetic Lock  
Exit Button | Break Glass  
Video Door Intercom



**PIXELS CONNECT PTE LTD**

1013, Geylang East Ave 3, #01-144 Singapore 389728

pixelsconnect@gmail.com | www.pixelsconnect.com.sg | Tel:+65 6440 0023