



PIXELS CONNECT PTE LTD




◆ SPECIFICATION

Model NO.	PIX-PCKBTA30HTC800FKP	PIX-PCKBTA30HTC800ESL	PIX-PCKBTA30HTC800ES	PIX-PCKBTA30HTC800FKE
Video Output Mode	AHD/TVI:8M@15fps, 5M@20fps/12.5fps, 4M/2M@30fps/25fps; CVI: 8M@15fps/12.5fps, 4M/2M@30fps/25fps	AHD: 8M@15fps, 5M@20fps/12.5fps, 4M/2M@30fps/25fps; CVI:8M@15fps/12.5fps, 4M/2M@30fps/25fps; TVI: 8M@15fps/12.5fps, 5M@20fps/12.5fps, 4M/2M@30fps/25fps	AHD/TVI/CVI: 8M@15fps/12.5fps, 4M/2M@30fps/25fps	AHD: 8M@15fps, 5M@20fps/12.5fps, 4M/2M@30fps/25fps; TVI/CVI: 8M@15fps/12.5fps, 5M@20fps/12.5fps 4M/2M@30fps/25fps
Camera				
Image Sensor	1/2.5" CMOS sensor	1/2.8" SONY Starvis Back-illuminated CMOS sensor	1/2.8" SONY CMOS sensor	1/2.5" CMOS sensor
Image Resolution	8M:3840*2160 5M:2592*1944	8M:3840*2160 5M:2592*1944	8M:3840*2160 4M:2560*1440 2M:1920*1080	8M:3840*2160 5M:2592*1944 4M:2560*1440 2M:1920*1080
TV System	PAL/NTSC	PAL/NTSC	PAL/NTSC	PAL/NTSC
Electronic Shutter	Auto	Auto	Auto	Auto
Scanning System	Progressive Scan	Progressive Scan	Progressive Scan	Progressive Scan
Lens				
Focus Length	Board Lens 3.6mm	Board Lens 3.6mm	Board Lens 3.6mm	Board Lens 3.6mm
Focus Control	Fixed	Fixed	Fixed	Fixed
Lens Type	Fixed	Fixed	Fixed	Fixed
Night Vision				
IR Cut Filter	YES	YES	YES	YES
Infrared LED	42μ x4PCS	42μ x4PCS	42μ x4PCS	42μ x4PCS
Infrared Distance	40M	40M	40M	40M
IR Status	AGC Auto Control	AGC Auto Control	AGC Auto Control	AGC Auto Control
Camera Features				
Starlight	/	/	/	/
Day/Night	YES	YES	YES	YES/NO
OSD Menu Language	YES	YES	YES	YES
WDR	DWDR	YES	YES	DWDR
UTC	YES	YES	YES	YES

Noise Reduction	3DNR	3DNR	3DNR	DNR
Coaxial Audio	/	/	/	YES(only TVI)
White Balance	AUTO / MANUAL	AUTO / MANUAL	AUTO / MANUAL	AUTO / MANUAL
Gain Control	AUTO	AUTO	AUTO	AUTO
General				
Housing	IP67	IP67	IP67	IP67
Bracket	YES	YES	YES	YES
Operation Temperature	-10°C ~ +60°C RH95% Max	-10°C ~ +60°C RH95% Max	-10°C ~ +60°C RH95% Max	-10°C ~ +60°C RH95% Max
Storage Temperature	-20°C ~ +60°C RH95% Max	-20°C ~ +60°C RH95% Max	-20°C ~ +60°C RH95% Max	-20°C ~ +60°C RH95% Max
Power Source	DC12V±10%,750mA	DC12V±10%,750mA	DC12V±10%,750mA	DC12V±10%,750mA
Dimension	170(W)x75(H)x77(D)mm	170(W)x75(H)x77(D)mm	170(W)x75(H)x77(D)mm	170(W)x75(H)x77(D)mm
Weight	770g	770g	770g	770g

Made In Taiwan

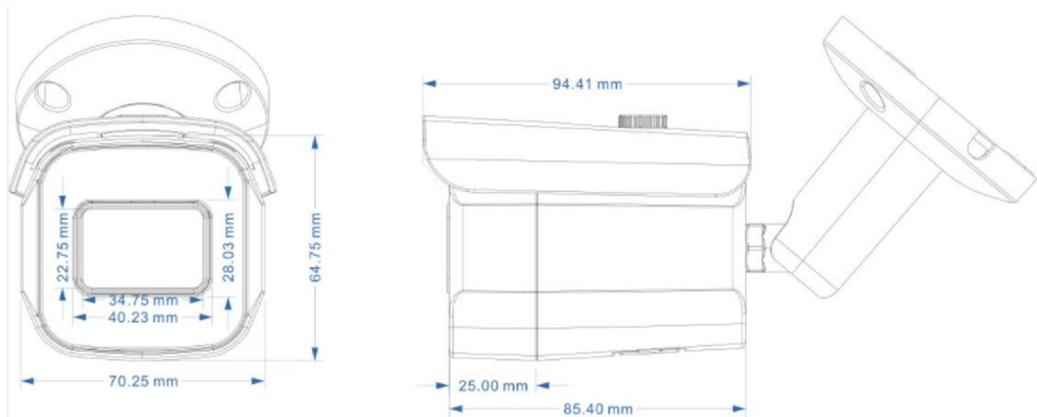

CCTV
 Analog Camera, IP Camera
 Dome & Bullet Cameras
 Hidden Cameras
 4K Cameras
 PTZ Cameras



Wireless Cameras
 Panoramic Camera
 4K Action Camera | Car Cameras
 Battery Cameras
 WiFi Door Bells
 Hidden Cameras



Biometric Devices
 Fingerprint | Face | Card |
 Access PIN Reader
 Electromagnetic Lock
 Exit Button | Break Glass
 Video Door Intercom



PIXELS CONNECT PTE LTD

1013, Geylang East Ave 3, #01-144 Singapore 389728

pixelsconnect@gmail.com | www.pixelsconnect.com.sg | Tel:+65 6440 0023