



PIXELS CONNECT PTE LTD


Easy Keypad

PIX-PCCK2

- * One relay, 1000 users (990 Normal Users + 10 Visitor Users)
- * 3 access modes: Card, PIN, Card + PIN
- * Card type: 125KHz EM card/13.56MHz Mifare card
- * PIN length: 4~6 digits
- * Anti-tamper alarm



Backlit




Temperature Range



Card/PIN

The PIX-PCCK2 is a single entry standalone Access Control with integrated keypad and card reader. It is an easy to install and operate device, design in as less as 6 wires for mounting.

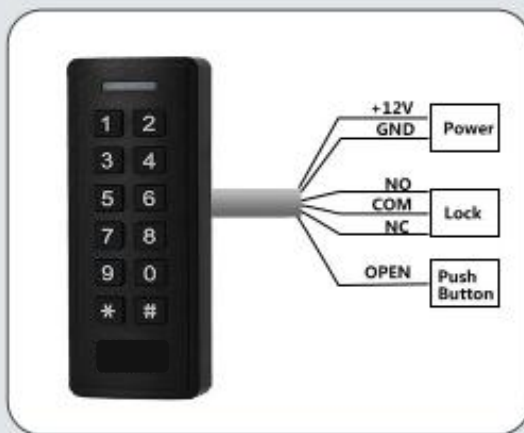

6 wires only, easy to install and operate



PIXELS CONNECT PTE LTD

Have Visitors?

No worry, use our CK2
It supports 10 visitor users
Can set valid for 1~10 times



Backlit Keypad

-40°C
Low Working Temperature







PIXELS CONNECT PTE LTD

| | |
|--|---|
| User Capacity Normal Users Visitor Users | 1000 Cards/PINS 990 10 |
| Operating Voltage Idle Current Active Current | 9~18V DC 50mA 80mA |
| Keypad | 12 Keys |
| Proximity Card Reader Radio Technology Read Range | EM/Mifare Optional 125KHz EM Card/ 13.56MHz Mifare Card 3-6 cm |
| Wiring Connections | Relay Output, Exit Button |
| Relay Adjustable Relay Output Time Lock Output Load | One (NO, NC, Common) 0-99 Seconds (5 seconds default) 3 Amp Maximum |
| Environment Operating Temperature Operating Humidity | Indoor -40°C~ 60°C (-40°F ~ 140°F) 10%RH-90%RH |
| Physical Color Dimensions Unit Weight Shipping Weight | ABS Enclosure Black, White optional 12.2L x 5.0W x 2.1H (cm) 150g 200g |



PIXELS CONNECT PTE LTD
Product Size

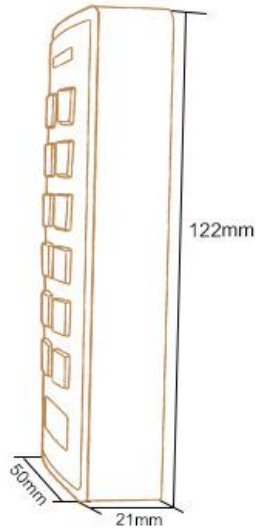

CCTV

Analog Camera, IP Camera
Dome & Bullet Cameras
Hidden Cameras
4K Cameras
PTZ Cameras



**Wireless
Cameras**

Panoramic Camera
4K Action Camera | Car Cameras
Battery Cameras
WiFi Door Bells
Hidden Cameras



**Biometric
Devices**

Fingerprint | Face | Card |
Access PIN Reader
Electromagnetic Lock
Exit Button | Break Glass
Video Door Intercom



PIXELS CONNECT PTE LTD

1013, Geylang East Ave 3, #01-144 Singapore 389728

pixelsconnect@gmail.com | www.pixelsconnect.com.sg | Tel:+65 6440 0023