





PIXELS CONNECT PTE LTD

## Economic Wiegand Reader (MF) PIX-PCCR3-R MF

- ❄️ Waterproof, conforms to IP66
- ❄️ Wiegand 26/34 bits output (default: 34bits)
- ❄️ Card type: 13.56MHz Mifare card
- ❄️ Working temperature: -25 oC ~ 60 oC (-13 oF ~ 140 oF)
- ❄️ Reading range: 0-5 cm

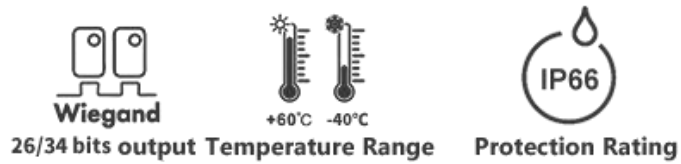

The PIX-PCCR3-R (MF) is an Economic Wiegand Output Proximity Reader, compatible with 13.56MHz Mifare format card. It is fully potted, and can function at extreme temperatures, so it can be mounted either indoor or outdoor.

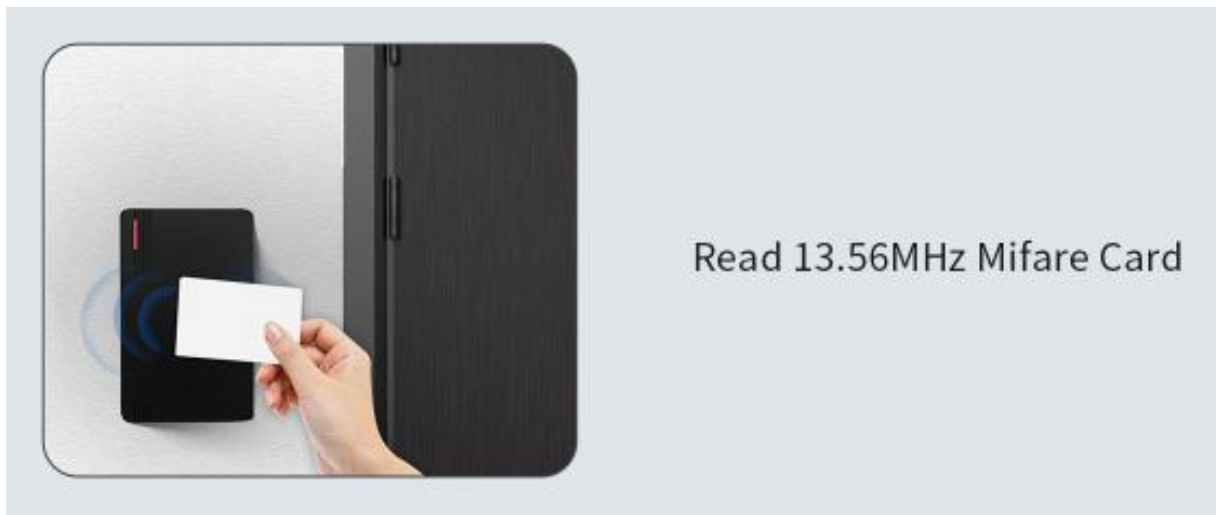



PIXELS CONNECT PTE LTD

Waterproof IP66



-25°C  
Low Working Temperature

Wiegand 34bits or 26bits  
(default 34bits)





## PIXELS CONNECT PTE LTD

Operating Voltage	9~18V DC
Frequency	13.56MHz
Card Type	Mifare card
Reading Distance	0-5 CM
Output Format	Wiegand 34bits (default), 26bits optional
Operating Temperature	-25 °C ~ 60 °C (-13 °F ~ 140 °F)
Index of Protection	IP66
Operating Humidity	10%~98% RH
Dimensions	L120 x W75 x H20 (mm)
Weight	195g



### CCTV

Analog Camera, IP Camera  
Dome & Bullet Cameras  
Hidden Cameras  
4K Cameras  
PTZ Cameras



### Wireless Cameras

Panoramic Camera  
4K Action Camera | Car Cameras  
Battery Cameras  
WiFi Door Bells  
Hidden Cameras



### Biometric Devices

Fingerprint | Face | Card |  
Access PIN Reader  
Electromagnetic Lock  
Exit Button | Break Glass  
Video Door Intercom



## PIXELS CONNECT PTE LTD

1013, Geylang East Ave 3, #01-144 Singapore 389728

pixelsconnect@gmail.com | www.pixelsconnect.com.sg | Tel:+65 6440 0023