




PIXELS CONNECT PTE LTD

WiFi Touchkey Access Controller PIX-PCHF3-WIFI

- * Capacitive Fingerprint Sensor,touch keypad
- * Waterproof, conforms to IP66
- * Metal housing, anti-vandal
- * Card type: EM Card or Mifare Card
- * iOS and Android available
- * Add / Delete users by APP
- * Can set Time Restriction for users
- * Temporary Password (One-time Or Period Code)
- * Support checking Opening Record
- * Remotely Access (Support 3G/4G/5G)
- * Multiple Access Modes: Smartphone, Fingerprint, Card, PIN
- * Doorbell Call Notice

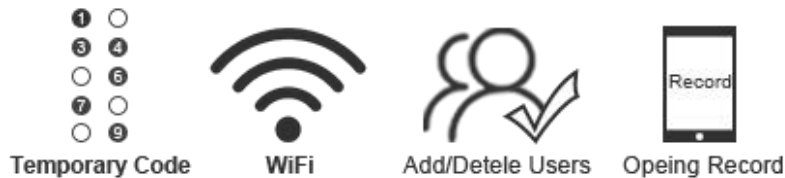

The HF3-WIFI is a WiFi waterproof touch keypad + fingerprint + RFID access controller. It's integrated with Tuya which supports 500 mobile users and 1000 local users (including fingerprint card/ PIN users). It's available for both iOS and Android.




2.4G WiFi network,
Mobile APP Access
APP name:
TuyaSmart or Smartlife





PIXELS CONNECT PTE LTD

User Management
Super Admin or Admin can
Add/Delete users in APP

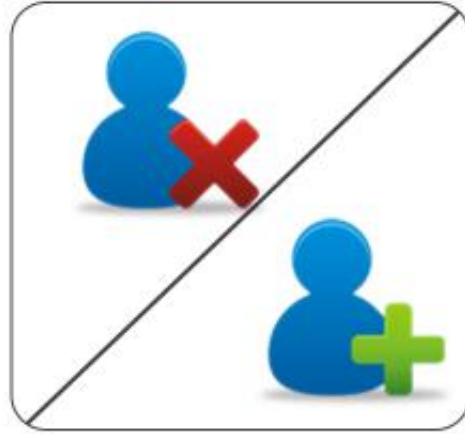

Opening History

DoorBell Call Notice





PIXELS CONNECT PTE LTD



Remotely Open Anywhere
Support 3G/4G/5G

Temporary Code -
One-time or Period code
can be programmable




User Capacity Common User Visitor User Panic User	Hardware User: 1000 APP User: 500 988 (100 Fingerprint Users + 888 PIN/Card Users) 10 2
PIN Length	4~6 digits
Operating Voltage Idle Current Active Current	12~18V DC ≤ 60mA ≤ 150mA



PIXELS CONNECT PTE LTD


Proximity Card Reader Radio Technology Read Range	EM or Mifare 125KHz/13.56MHz 2~6cm
Wiring Connections	Relay output, exit button, alarm, door contact, Wiegand input/output
Relay Adjustable Relay Output Time Lock Output Load	One (NO, NC, Common) 0~99 Seconds (5 seconds default) 2 Amp Maximum
Wiegand Interface PIN Output	EM card version: Wiegand 26~44 bits input & output (Factory default: Wiegand 26bits) Mifare card version: Wiegand 26~44 bits, 56bits, 58bits input & output (Factory default: Wiegand 34bits) 4 bits, 8bits (ASCII), 10 digits Virtual Number (Factory default: 4bits)
Environment Operating Temperature Operating Humidity	Meets IP66 -30°C ~ 60°C (-22°F ~ 140°F) 0%RH ~ 98%RH
Physical Color Dimensions Unit Weight Shipping Weight	Zinc-Alloy Sliver & Black L148 x W43.5 x H22 (mm) 330g 405g

Product Size

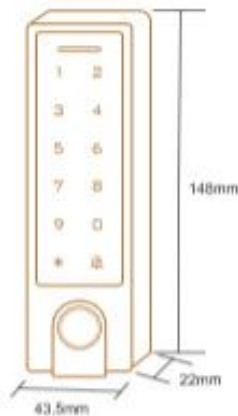



PIXELS CONNECT PTE LTD



CCTV

Analog Camera, IP Camera
Dome & Bullet Cameras
Hidden Cameras
4K Cameras
PTZ Cameras



Wireless Cameras

Panoramic Camera
4K Action Camera | Car Cameras
Battery Cameras
WiFi Door Bells
Hidden Cameras



Biometric Devices

Fingerprint | Face | Card |
Access PIN Reader
Electromagnetic Lock
Exit Button | Break Glass
Video Door Intercom



PIXELS CONNECT PTE LTD

1013, Geylang East Ave 3, #01-144 Singapore 389728

pixelsconnect@gmail.com | www.pixelsconnect.com.sg | Tel:+65 6440 0023