



## PIXELS CONNECT PTE LTD




### ◆ SPECIFICATION

Model NO.	PIX-PCIPSHQ30FK500W
<b>Camera</b>	
Image Sensor	1/2.5" High-resolution CMOS Sensor
Resolution	5MP
Effective Pixels	2608(H)*1952(V)
Compression	H.264/H.264+/H.265/H.265+/JPEG/AVI/MJPEG
TV System	PAL/NTSC
Electronic Shutter Time	Auto: PAL 1/25-1/10000Sec; NTSC 1/25-1/10000Sec
Minimum Illumination	0.01Lux
S/N Ratio	≥52dB
Scanning System	Progressive
Video Output	Network
Reset Button	NO
<b>LENS Type</b>	
Focus Length	2.8mm
Focus Control	manual
Lens Type	manual
Pixels	5MP
<b>Night Vision</b>	
Infrared LED	14μx 24PCS
Infrared Distance	30M
IR Status	Auto

IR Power On	Auto
<b>Network</b>	
Ethernet	RJ-45 (10/100Base-T)
Protocol	TCP/IP,ICMP,HTTP,HTTPS,FTP,DHCP,DNS,DDNS,RTP,RTSP,RTCP,NTP,SMTP
ONVIF	Support ONVIF 2.4(Profile S)
P2P	YES, Support QR Code
POE	/
Video Delay	0.3S (Within the Lan)
Main Stream 1	2592*1944@20fp 2560*1920@20fp
Main Stream 2	2560*1440@30fp
Main Stream 3	1920*1080@30fps
Sub Stream 1	720*480@20fps 720*480@30fps
Sub Stream 2	/
Sub Stream 3	/
Tri Stream	/
IE Brower	IE9-11, Google Chrome(Under Ver 45), Firefox(Under Ver 53), Mac Safari(Under ver 11)
Smart Phone	iPhone, iPad, Android, Android Pad
<b>Wireless</b>	
Antena	3dbi
Hotspot	/
Wi-Fi	Wi-Fi(IEEE802.11b/g/n),2.4Ghz
WIFI Range	No obstacles 300m Max.
<b>Camera Features</b>	
Day/Night	Color/ B&W (IR-CUT )
Image Config	Saturation/Brightness/Contrast /Sharpness, Mirror, 3D NR , White Balance, FLK(Flicker Control)
Corridor Pattern	Support
ROI	/
Defog Mode	Support
BLC	Support
HDR	/
WDR	/
Motion Detection	Support

Privacy Masking	3 Rectangular Zone
Recording Mode	NVR/VMS/Web/SD Card
Language	Chinese Simplified, Chinese Traditional, English, Bulgarian, Polish, Arabic, German, Russian, French, Korean, Portuguese, Japanese, Turkish, Spanish, Hebrew, Italian, Netherlands, Czech, Vietnamese
<b>Interface</b>	
Audio	Optional Audio in by Line(RCA interface)
Alarm	/
SD Card Slot	support 256G Micro SD With External SD Card Slot
RS485	/
<b>General</b>	
Housing	Metal, IP67
Anti-cut Bracket	NO
IR Cut Filter	YES
Operation Temperature	-20°C ~ +60°C RH95% Max
Storage Temperature	-20°C ~ +60°C RH95% Max
Power Source	DC12V±10%, 950mA
Dimension	∅ 120 x 104(H) mm
Weight	600g

Made In Taiwan

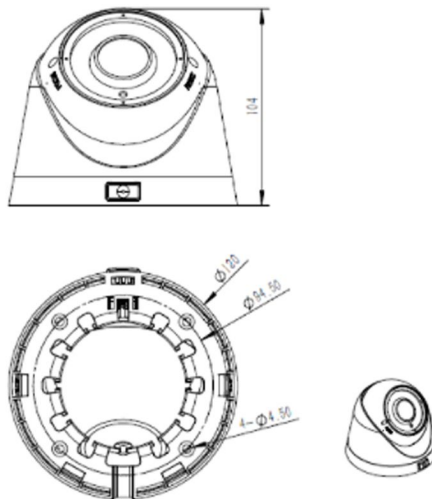

**CCTV**

Analog Camera, IP Camera  
Dome & Bullet Cameras  
Hidden Cameras  
4K Cameras  
PTZ Cameras



**Wireless  
Cameras**

Panoramic Camera  
4K Action Camera | Car Cameras  
Battery Cameras  
WiFi Door Bells  
Hidden Cameras



**Biometric  
Devices**

Fingerprint | Face | Card |  
Access PIN Reader  
Electromagnetic Lock  
Exit Button | Break Glass  
Video Door Intercom



**PIXELS CONNECT PTE LTD**

1013, Geylang East Ave 3, #01-144 Singapore 389728

pixelsconnect@gmail.com | www.pixelsconnect.com.sg | Tel:+65 6440 0023