




PIXELS CONNECT PTE LTD

Wiegand Reader (E/H/Mifare)
PIX-PCS1-RX

- ❄️ Waterproof, conforms to IP66
- ❄️ Wiegand 26~37 bits output (default: 26bits)
- ❄️ Card type: Hid card, EM card & Mifare card
- ❄️ Reading range: 7 cm
- ❄️ External LED Control & External Buzzer Control
- ❄️ Working temperature: -40 oC ~ 60 oC(-40 oF ~ 140 oF)

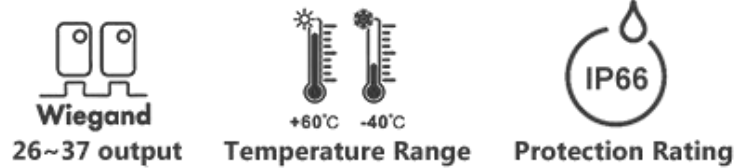

The PIX-PCS1-RX reader is an advanced 125KHz & 13.56MHz technology proximity reader. It is attractively designed with a thin profile and modern appearance, and waterproof.





PIXELS CONNECT PTE LTD



-40°C
Low working temperature

Wiegand 26~37bits(default 26bits)

Data 0
Data 1



Card Type: EM+HID+Mifare



PIXELS CONNECT PTE LTD

3 Kinds of Interface



50cm cable
(Standard)



RJ45
(optional)





Terminal Blocks
(Optional)

Operating Voltage	9~24V DC
Frequency	125KHz & 13.56MHz
Card Type	125KHz - EM & Hid Card 13.56MHz - Mifare Card (ISO 14443A Compatible)
Reading Distance	7 CM
Output Format	Wiegand 26 bits (26~37 bits available upon request)
Operating Temperature	-40 °C ~ 60 °C (-40 °F ~ 140 °F)
Standby Current	< 25mA
Operating Humidity	10%~95% RH
Index of Protection	IP66
Dimensions	L103 x W48 x H19 (mm)
Operating Voltage	9~24V DC



PIXELS CONNECT PTE LTD

Product Size

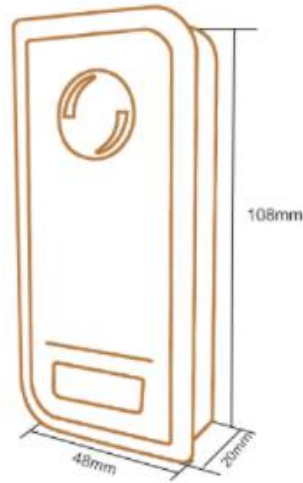

CCTV

Analog Camera, IP Camera
Dome & Bullet Cameras
Hidden Cameras
4K Cameras
PTZ Cameras



**Wireless
Cameras**

Panoramic Camera
4K Action Camera | Car Cameras
Battery Cameras
WiFi Door Bells
Hidden Cameras



**Biometric
Devices**

Fingerprint | Face | Card |
Access PIN Reader
Electromagnetic Lock
Exit Button | Break Glass
Video Door Intercom



PIXELS CONNECT PTE LTD

1013, Geylang East Ave 3, #01-144 Singapore 389728

pixelsconnect@gmail.com | www.pixelsconnect.com.sg | Tel:+65 6440 0023