




PIXELS CONNECT PTE LTD


Wiegand Reader (E/H)

PIX-PCS2-R

- ❄️ Waterproof, conforms to IP66
- ❄️ Wiegand 26~37 bits output (default: 26bits)
- ❄️ Card type: 125KHz EM and Hid card
- ❄️ Working temperature: -40 oC ~ 60 oC (-40 oF ~ 140 oF)
- ❄️ Reading range: 7 cm

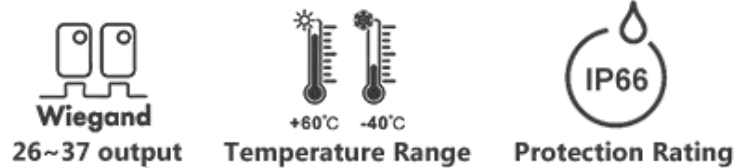

The PIX-PCS2-R is a slim Wiegand Output Proximity Reader, compatible with 125KHz EM&HID format card. It is fully potted, and can function at extreme temperatures, so it can be mounted either indoor or outdoor.

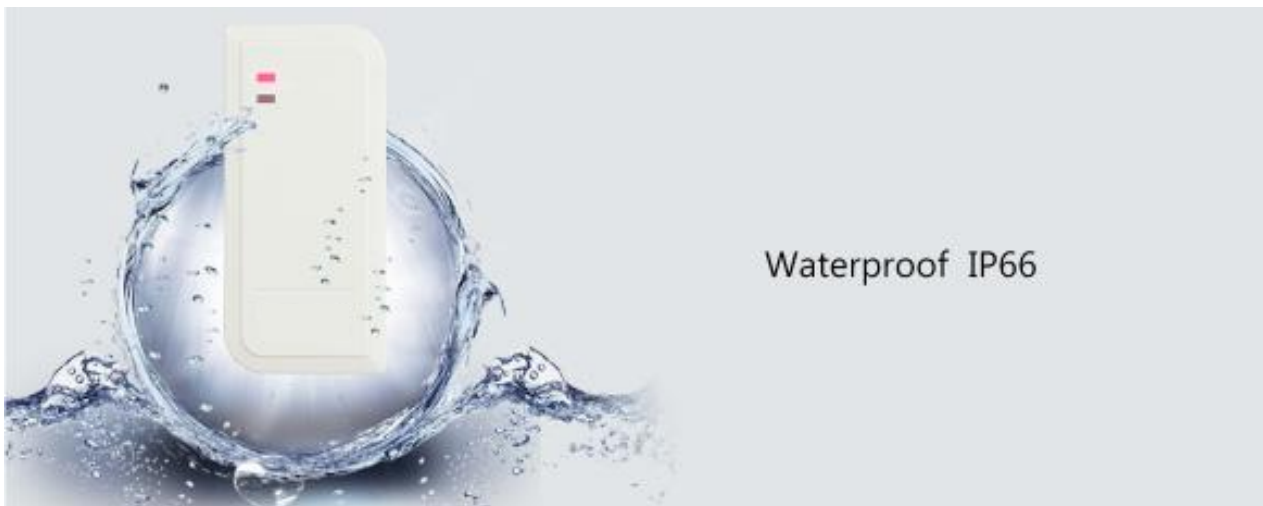



PIXELS CONNECT PTE LTD



-40°C
Low working temperature



Data 0
Data 1



Wiegand 26~37bits(default 26bits)

Card Type: EM+HID





PIXELS CONNECT PTE LTD





Operating Voltage	9~24V DC
Frequency	125KHz
Card Type	EM & Hid card
Reading Distance	7 CM
Output Format	Wiegand 26 bits (26~37 bits available upon request)
Operating Temperature	-40 °C ~ 60 °C (-40 °F ~ 140 °F)
Standby Current	< 25mA
Operating Humidity	10%~95% RH
Index of Protection	IP66
Dimensions	L103 x W48 x H19 (mm)
Operating Voltage	9~24V DC



PIXELS CONNECT PTE LTD

Product Size

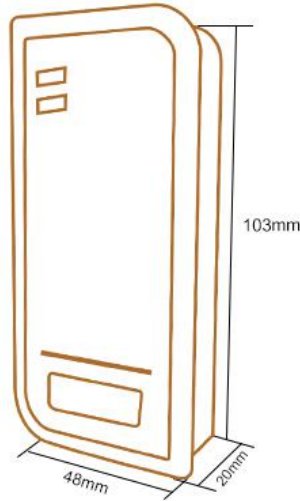

CCTV

Analog Camera, IP Camera
Dome & Bullet Cameras
Hidden Cameras
4K Cameras
PTZ Cameras



**Wireless
Cameras**

Panoramic Camera
4K Action Camera | Car Cameras
Battery Cameras
WiFi Door Bells
Hidden Cameras



**Biometric
Devices**

Fingerprint | Face | Card |
Access PIN Reader
Electromagnetic Lock
Exit Button | Break Glass
Video Door Intercom



PIXELS CONNECT PTE LTD

1013, Geylang East Ave 3, #01-144 Singapore 389728

pixelsconnect@gmail.com | www.pixelsconnect.com.sg | Tel:+65 6440 0023