




PIXELS CONNECT PTE LTD

**Wiegand Reader (E/H/Mifare)**  
**PIX-PCS2-RX**

- ❄️ Waterproof, conforms to IP66
- ❄️ Wiegand 26~37 bits output (default: 26bits)
- ❄️ Card type: Hid card, EM card & Mifare card
- ❄️ Reading range: 7 cm
- ❄️ External LED Control & External Buzzer Control
- ❄️ Working temperature: -40 oC ~ 60 oC(-40 oF ~ 140 oF)

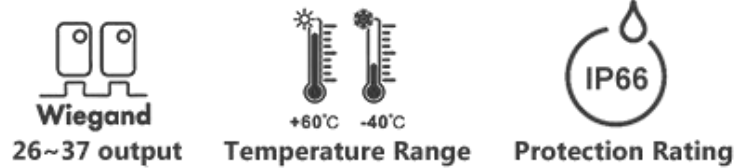

The PIX-PCS2-RX reader is an advanced 125KHz & 13.56MHz technology proximity reader. It is attractively designed with a thin profile and modern appearance, and waterproof.





PIXELS CONNECT PTE LTD



-40°C  
Low working temperature



Data 0  
Data 1

Wiegand 26~37bits(default 26bits)

Card Type: EM+Mifare+HID





## PIXELS CONNECT PTE LTD

### 3 Kinds of Interface



50cm cable  
(Standard)



RJ45  
(optional)




Terminal Blocks  
(Optional)

Operating Voltage	9~24V DC
Frequency	125KHz & 13.56MHz
Card Type	125KHz - EM & Hid Card 13.56MHz - Mifare Card (ISO 14443A Compatible)
Reading Distance	7 CM
Output Format	Wiegand 26 bits (26~37 bits available upon request)
Operating Temperature	-40 °C ~ 60 °C (-40 °F ~ 140 °F)
Standby Current	< 25mA
Operating Humidity	10%~95% RH
Index of Protection	IP66
Dimensions	L103 x W48 x H19 (mm)
Operating Voltage	9~24V DC



PIXELS CONNECT PTE LTD

### Product Size

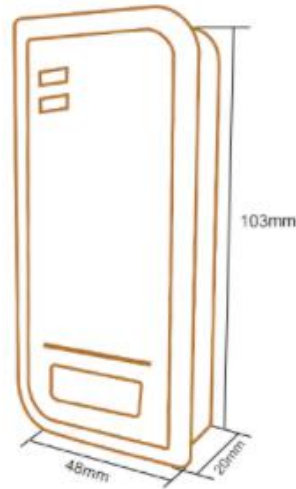

**CCTV**

Analog Camera, IP Camera  
Dome & Bullet Cameras  
Hidden Cameras  
4K Cameras  
PTZ Cameras



**Wireless  
Cameras**

Panoramic Camera  
4K Action Camera | Car Cameras  
Battery Cameras  
WiFi Door Bells  
Hidden Cameras



**Biometric  
Devices**

Fingerprint | Face | Card |  
Access PIN Reader  
Electromagnetic Lock  
Exit Button | Break Glass  
Video Door Intercom



## PIXELS CONNECT PTE LTD

1013, Geylang East Ave 3, #01-144 Singapore 389728

pixelsconnect@gmail.com | www.pixelsconnect.com.sg | Tel:+65 6440 0023