

# Mini Single Door Controller PIX-PCSboard


- 1,000 users,user data can be transferred
- Multi access modes: Card, Card or PIN, Card with PIN and multi Cards/PINs
- ★ Can connect with any reader with Wiegand 26~37 bits output
- 😤 Can connect with any keypad reader with 4bits, 8bits (ASCII), or 10bits Virtual number output



PIX-PCSboard is a mini controller for single door, with Wiegand 26~37bits input, can connect with any Wiegand reader.





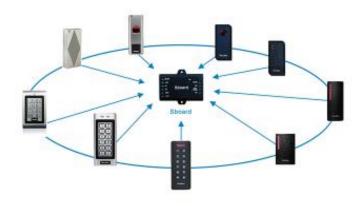

Can control any reader in the world!






Multi-programming ways



User Capacity	1,000
Operating Voltage Idle Current	9~24V DC < 20mA
Relay Adjustable Relay Output Time Lock Output Load	One (NO, NC, Common) 0~99 Seconds (5 seconds default) 2 Amp Maximum
Wiegand Interface Input Output	Wiegand 26~37 bits Wiegand 26~37 bits (for user transfer)
Environment Operating Humidity	Indoor 0 ~ 90%RH
Physical Colour Dimensions Unit Weight Shipping Weight	ABS Shell Black 6.5L x 5.4W x 1.9H (cm) 40g 100g



## **Product Size**







Analog Camera, IP Came Dome & Bullet Cameras Hidden Cameras 4K Cameras PTZ Cameras



4K Action Camera | Car Camera: Battery Cameras WiFi Door Bells Hidden Cameras



Access PIN Reader Electromagnetic Lock Exit Button | Break Glass Video Door Intercom



#### PIXELS CONNECT PTE LTD

1013, Geylang East Ave 3, #01-144 Singapore 389728 pixelsconnect@gmail.com | www.pixelsconnect.com.sg | Tel:+65 6440 0023