

PIXELS CONNECT PTE LTD

Outdoor Keypad & EM Reader PIX-PCSK2-EM

- 😤 Waterproof, conforms to IP66
- * One relay, 1000 users
- 🖄 Wiegand 26~37 bits input & output
- 😤 User data can be transferred by Wiegand line
- * Access modes: Card, PIN, Card + PIN, Multi Cards/PINs
- Tard type: 125KHz EM card, PIN length: 4~6 digits
- Pulse mode, toggle mode
- 2pcs device support interlock for two doors







Protection Rating

Users transferred

The PIX-PCSK2-EM is a single door multi-function standalone access controller or a wiegand output reader.It supports 1,000 users (998 common users + 2 panic users), all user data can be transferred from one to another (Max 10pcs).



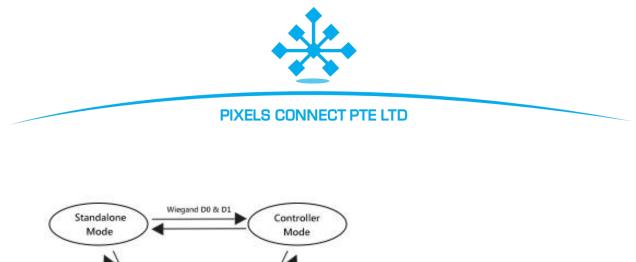



Three working modes-Wiegand 26~37 bits input & output

2pcs devices support
interlock for two doorsPower SupplyImage: A zoneImage: A zoneA zoneB zone

998
2
9~18V DC
< 35mA
EM
125KHz Proximity Card
2~6 cm
Relay output, exit button, alarm, door contact, Wiegand input, Wiegand output
One (NO, NC, Common) 1~99 Seconds (5 seconds default)

PIX-PCSK2-EM (OUTDOOR KEYPAD & EM READER)


PIXELS CONNECT PTE. LTD.



PIXELS CONNECT PTE LTD

Lock Output Load	2 Amp Maximum
Wiegand Interface	Wiegand 26~37bits
Wiegand Input	26~37bits
Wiegand Output	26~37bits
PIN Output	4 bits, 8 bits(ASCII), 10 digits Virtual Number
Environment	Meets IP66
Operating Temperature	-40 °C ~ 60 °C (-40 °F ~ 140 °F)
Operating Humidity	0%RH ~ 98%RH
Physical	ABS Shell
Color	Black
Dimensions	12.2L x 5.0W x 2.1H (cm)
Unit Weight	165g
Shipping Weight	260g

Product Size





1013, Geylang East Ave 3, #01-144 Singapore 389728 pixelsconnect@gmail.com | www.pixelsconnect.com.sg | Tel:+65 6440 0023

PIXELS