



PIXELS CONNECT PTE LTD

Wiegand Reader (E+H)
PIX-PCSK2-R

- * Waterproof, conforms to IP66
- * Wiegand 26~37 bits output (default: 26bits)
- * Card type: 125KHz Hid & EM card
- * Working temperature: -40 oC ~ 60 oC
(-40 oF ~ 140 oF)
- * Reading range: 4 ~ 8 cm



The PIX-PCSK2-R is a Wiegand output keypad, with integrated proximity reader. The keypad is of digital backlit, supports to read 125KHz EM & HID cards. Because of waterproof, it can be mounted either indoor or outdoor in harsh environments.





PIXELS CONNECT PTE LTD

Keypad Transmission format: 4bits
(8bits and 10bits virtual card number
can be customized)



Data 0
Data 1

Wiegand 26~37bits output
(default: 26bits)



50cm cable
(Standard)



RJ45
(Optional)



Terminal Blocks
(Optional)


3 Kinds of Interface



PIXELS CONNECT PTE LTD

Operating Voltage	9~18V DC
Frequency	125KHz
Card Type	Hid & EM Card
Reading Distance	4~8 CM
Output Format	Wiegand 26 bits (factory default) (26~37 bits available upon request)
Keypad Transmission Format	4 bits (factory default) 8bits or virtual card number format are available upon request
Operating Temperature	-40 °C ~ 60 °C (-40 °F ~ 140 °F)
Standby Current	< 35mA
Operating Humidity	0%~96% RH
Index of Protection	IP66
Dimensions	12.2L x 5.0W x 2.1H (cm)
Color	Black, Ivory

Product Size

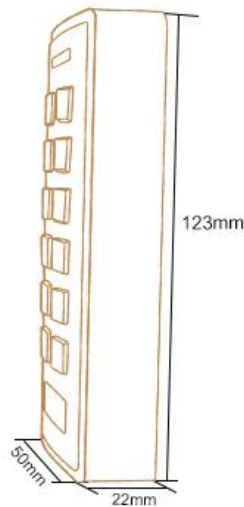



PIXELS CONNECT PTE LTD



CCTV

Analog Camera, IP Camera
Dome & Bullet Cameras
Hidden Cameras
4K Cameras
PTZ Cameras



**Wireless
Cameras**

Panoramic Camera
4K Action Camera | Car Cameras
Battery Cameras
WiFi Door Bells
Hidden Cameras



**Biometric
Devices**

Fingerprint | Face | Card |
Access PIN Reader
Electromagnetic Lock
Exit Button | Break Glass
Video Door Intercom



PIXELS CONNECT PTE LTD

1013, Geylang East Ave 3, #01-144 Singapore 389728

pixelsconnect@gmail.com | www.pixelsconnect.com.sg | Tel:+65 6440 0023