

Universal Keypad (EM +HID +MF) PIX-PCSK6-X (LED)


- With 2 extra wires, LED can be controller by external control panel
- * Waterproof, conforms to IP66
- ★ One relay, 600 users
- 😤 Card type: 125KHz EM card,125KHz HID card, and 13.56Mhz Mifare Card
- PIN length: 4~6 digits
- ★ Wiegand 26~37 bits input & output
- 😤 Can be used as Wiegand reader with LED & Buzzer output
- * Pulse mode, Toggle mode
- 2 devices can be interlocked for 2 doors
- ★ 12~28V AC/ DC



The PIX-PCSK6-X(LED) is an update version of SK6-X, with 2 extra wires, its LED can be controller by external control panel.





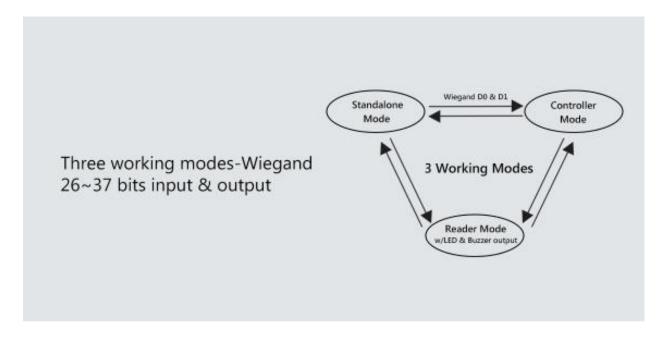

Wide Voltage Range:

12 ~ 28 VOLTS VOLTS








User Capacity Common Users	600 598
Panic Users	2
Operating Voltage	12~28V AC/DC
Idle Current	< 65mA
Active Current	< 100MA
Proximity Card Reader	HID & EM & Mifare
Radio Technology	125KHz &13.56Mhz
Read Range	2~6 cm
Wiring Connections	Relay output, exit button, alarm, door contact, Wiegand input, Wiegand output
Relay	One (NO, NC, Common)
Adjustable Relay Output Time	0~99 Seconds (5 seconds default)
Lock Output Load	2 Amp Maximum
Wiegand Interface	Wiegand 26~37bits
Wiegand Input	26~37bits
Wiegand Output	26~37bits
PIN Output	4 bits, 8 bits(ASCII), 10 digits Virtual Number
Environment	Meets IP66
Operating Temperature	-40 °C ~ 60 °C (-40 °F ~ 140 °F)
Operating Humidity	0%RH ~ 98%RH
Physical	Zinc-Alloy Enclosure
Surface Finish	Powder Coat
Dimensions	L150xW51xH23mm
Unit Weight	500g
Shipping Weight	600g



Product Size







Analog Camera, IP Camera Dome & Bullet Cameras Hidden Cameras 4K Cameras PTZ Cameras



Panoramic Camera 4K Action Camera | Car Cameras Battery Cameras Wifi Door Bells Hidden Cameras



Fingerprint | Face | Card | Access PIN Reader Electromagnetic Lock Exit Button | Break Glass Video Door Intercom



PIXELS CONNECT PTE LTD

1013, Geylang East Ave 3, #01-144 Singapore 389728 pixelsconnect@gmail.com | www.pixelsconnect.com.sg | Tel:+65 6440 0023