




PIXELS CONNECT PTE LTD

Outdoor Metal Digital Keypad (Mifare) PIX-PCXK1-MF

- * Metal case, all-metal key, anti-vandal
- * Waterproof, conforms to IP66
- * One relay, 1,000 users (988 common users + 2 panic users + 10 visitor users)
- * PIN length: 4~6 digits
- * Read 13.56MHz Mifare card (4 bytes, 7 bytes ISO14443 Type A)
- * Wiegand 26~44, 56, 58bits input & output
- * Can be used as Wiegand reader with LED & buzzer output
- * Pulse mode, Toggle mode
- * User data can be transferred
- * 2 devices can be interlocked for 2 doors
- * Built-in light dependent resistor (LDR) for anti tamper
- * Backlit keypad, can set automatic OFF after 20 seconds
- * Low temperature resistance(-40°C)
- * Voltage: 12~28V AC/DC

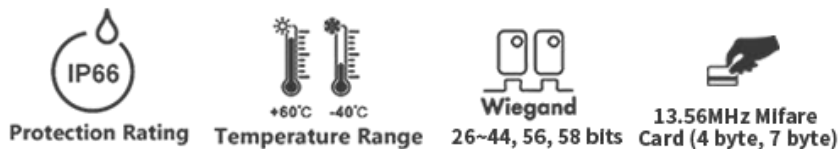

The PIX-PCXK1-MF reads 13.56MHz Mifare card (4 bytes, 7 bytes), supports 1,000 users (including 2panic users and 10 visitor users) Its key is all metal and the key frame is hidden, it can work standalone, or work as a controller or a standard Wiegand reader.



Card Type: 13.56MHz Mifare Card
(4 byte, 7 byte ISO14443 Type A)



PIXELS CONNECT PTE LTD

- Keypad Backlit and LED can be set
- Always ON
 - Always OFF
 - Automatically OFF after 20 seconds



IP66 Waterproof

Wide Voltage Range:
12 ~ 28
VOLTS VOLTS






PIXELS CONNECT PTE LTD


User Capacity Common User Panic User Visitor User	1000 988 2 10
Operating Voltage Idle Current	12~28V AC/DC <35mA
Proximity Card Reader Radio Technology Read Range	Mifare (4bytes, 7bytes ISO14443 Type A) 13.56MHz 2~6 cm
PIN Length	4~6 digits
Wiring Connections	Relay Output, Exit Button, Alarm, Door Contact, Wiegand Input, Wiegand Output
Relay Adjustable Relay Output Time Lock Output Load	One (NO, NC, Common) 0~99 Seconds (5 seconds default) 2 Amp Maximum
Wiegand Interface PIN Output	Wiegand 26-44, 56, 58bits input & output 4 bits, 8 bits(ASCII), 10 digits Virtual Number (Factory Default: Wiegand 34bits, 4 bits)
Environment Operating Temperature Operating Humidity	Meets IP66 -40°C ~ 60°C (-40°F ~ 140°F) 0%RH~98%RH
Physical Color Dimensions Unit Weight Shipping Weight	Zinc-Alloy Silver L114.5 x W75 x D22mm 360g 440g

Product Size

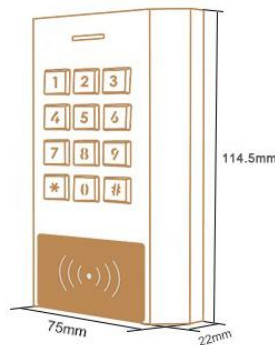



PIXELS CONNECT PTE LTD

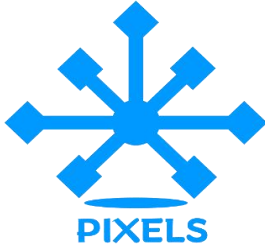

CCTV

Analog Camera, IP Camera
Dome & Bullet Cameras
Hidden Cameras
4K Cameras
PTZ Cameras



Wireless Cameras

Panoramic Camera
4K Action Camera | Car Cameras
Battery Cameras
WiFi Door Bells
Hidden Cameras



Biometric Devices

Fingerprint | Face | Card |
Access PIN Reader
Electromagnetic Lock
Exit Button | Break Glass
Video Door Intercom



PIXELS CONNECT PTE LTD

1013, Geylang East Ave 3, #01-144 Singapore 389728

pixelsconnect@gmail.com | www.pixelsconnect.com.sg | Tel:+65 6440 0023