



PIXELS CONNECT PTE LTD

Embedded RFID Access PIX-PCE3

- * Metal case, embedded design
- * Waterproof, conforms to IP66
- * One relay, 2000 users, standalone
- * Card type: 125KHz EM card
- * Working temperature: -40 oC ~ 60 oC
- * Pulse mode, toggle mode
- * Built in LDR for anti tamper
- * Card block enrollment
- * Wiegand 26 bits output
- * Wiegand 26/34 bits input automatic identification



Protection Rating



Anti-Vandal



Master Add / Delete Card

The device is a metal case standalone RFID access control with embedded design, the wiegand input&output make it also could be a controller or wiegand reader.



Embedded Design



PIXELS CONNECT PTE LTD

Waterproof, IP66



Card Type
125KHZ EM Card
1000 Users
990 Cards
10 Visitor Users

Wiegand input & output

Data 0

Data 1







PIXELS CONNECT PTE LTD

User Capacity Card	2000 EM Card
Operating Voltage Idle Current	12~24V DC < 50mA
Proximity Card Reader Radio Technology Read Range	EM 125KHz 0~6cm
Wiring Connections	Relay output, exit button, wiegand(in&out)
Relay Adjustable Relay Output Time Lock Output Load	One (NO, NC, Common) 0-99 Seconds (5 seconds default) 2 Amp Maximum
Environment Operating Temperature Operating Humidity	Meets IP66 -40 °C ~ 60 °C (-40 °F ~ 140 °F) 20% RH ~ 98% RH
Physical Color Dimensions Unit Weight Shipping Weight	Stainless Steel Plate Silver & Black 86x86x25mm 230g 270g

Product Size

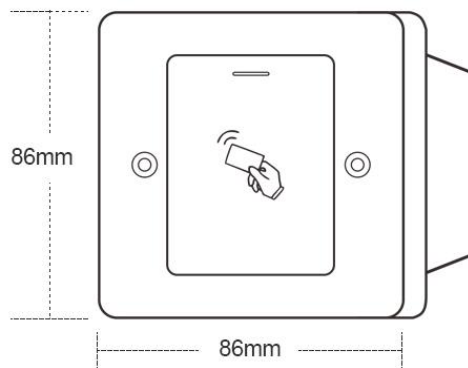

CCTV

Analog Camera, IP Camera
Dome & Bullet Cameras
Hidden Cameras
4K Cameras
PTZ Cameras



Wireless Cameras

Panoramic Camera
4K Action Camera | Car Cameras
Battery Cameras
WiFi Door Bells
Hidden Cameras



Biometric Devices

Fingerprint | Face | Card |
Access PIN Reader
Electromagnetic Lock
Exit Button | Break Glass
Video Door Intercom



PIXELS CONNECT PTE LTD

1013, Geylang East Ave 3, #01-144 Singapore 389728

pixelsconnect@gmail.com | www.pixelsconnect.com.sg | Tel:+65 6440 0023