

Bluetooth Touch Keypad PIX-PCH3-BT

- 😤 Waterproof, conforms to IP66
- 🖄 Metal housing, anti-vandal
- 😤 Card type: EM Card or Mifare Card
- * iOS and Android available
- 😤 Add / Delete users by APP
- 🖄 Support checking Opening Record
- Support Gateway
- * Multiple Access Modes: Smartphone, Card, PIN




The PIX-PCK9 is a single entry standalone Access Control with integrated keypad and card reader. It is an easy to install and operate device, with doorbell and support remote control for open the door.



Compatible with all Bluetoothenabled mobile phones (version: 4.0 above)



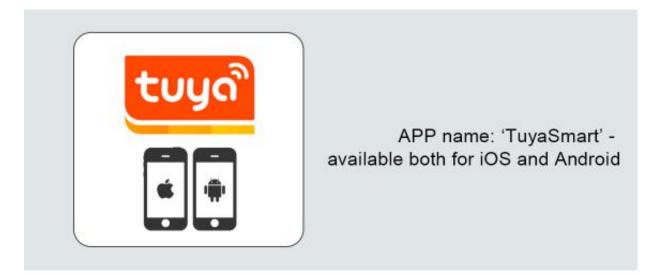

Support Gateway






User Capacity Common User Visitor User Panic User	Hardware User: 1000 APP User: 100 (including 255 card/ PIN users) 988 10 2
PIN Length	4~6 digits
Operating Voltage Idle Current Active Current	12~18V DC ≤ 60mA ≤ 150mA
Proximity Card Reader Radio Technlogy Read Range	EM or Mifare 125KHz/13.56MHz 2~6cm
Wiring Connections	Relay output, exit button, alarm, door contact, Wiegand input/output
Relay Adjustable Relay Output Time Lock Output Load	One (NO, NC, Common) 0~99 Seconds (5 seconds default) 2 Amp Maximum
Wiegand Interface PIN Output	EM card version: Wiegand 26~44 bits input & output (Factory default: Wiegand 26bits) Mifare card version:Wiegand 26~44 bits,56bits,58bits input & output (Factory default: Wiegand 34bits) 4 bits,8bits (ASCII),10 digits Virtual Number(Factory default:4bits)



Environment	Meets IP66
Operating Temperature	-40°C ~ 60°C (-40°F ~ 140°F)
Operating Humidity	0%RH ~ 98%RH
Physical	Zinc-Alloy
Color	Sliver & Black
Dimensions	L148 x W43.5 x H22 (mm)
Unit Weight	330g
Shipping Weight	405g

Product Size





pixelsconnect@gmail.com | www.pixelsconnect.com.sg | Tel:+65 6440 0023

PIX-PCH3-BT (BLUETOOTH TOUCH KEYPAD)

PIXELS CONNECT PTE. LTD.