

Standalone Economical Reader PIX-PCS2-EM

- 😤 Waterproof, conforms to IP66
- * One relay, 2000 users, standalone
- * Card type: 125KHz EM card only
- * Working temperature: -40 oC ~ 60 oC (-40 oF ~ 140 oF)
- 😤 Pulse mode, toggle mode
- 😤 Built in LDR for anti tamper
- 😤 Card block enrolment
- * Easy for programming by master cards and remote control
- 😤 Easy for install, 6 wires only




The PIX-PCS2-EM is a compact, waterproof stand-alone programmable access control system. The product unique feature is simple in design, easy operation, and high reliability.



Waterproof IP66



6 wires, easy installing





Built in LDR for anti tamper




PIXELS CONNECT PTE. LTD.



User Capacity Card	2000 EM card	
Operating Voltage Idle Current	9~24V DC < 40mA	
Proximity Card Reader Radio Technology Read Range	EM 125KHz proximity card 3~10cm	
Wiring Connections	Relay output, exit button	
Relay Adjustable Relay Output Time Lock Output Load	One (NO, NC, Common) 0-99 Seconds (5 seconds default) 2 Amp Maximum	
Environment Operating Temperature Operating Humidity	Meets IP66 -40 °C ~ 60 °C (-40 °F ~ 140 °F) 20% RH ~ 98% RH	
Physical Colour Dimensions Unit Weight Shipping Weight	ABS Shell Black 10.3L x 4.8W x 2.0H (cm) 100g 150g	



Product Size

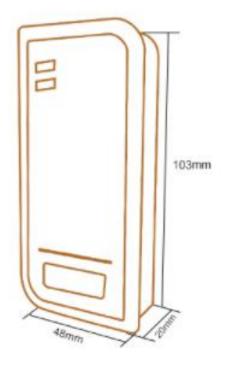



Analog Camera, IP Camera Dome & Bullet Cameras Hidden Cameras 4K Cameras PTZ Cameras



Panoramic Camera 4K Action Camera | Car Cameras Battery Cameras WiFi Door Bells Hidden Cameras



Fingerprint | Face | Card | Access PIN Reader Electromagnetic Lock Exit Button | Break Glass Video Door Intercom





1013, Geylang East Ave 3, #01-144 Singapore 389728 pixelsconnect@gmail.com | www.pixelsconnect.com.sg | Tel:+65 6440 0023

PIX-PCS2-EM (STANDALONE ECONOMICAL READER)

PIXELS CONNECT PTE. LTD.