

Standalone Mifare Reader **PIX-PCS2-MF**

- 😤 Waterproof, conforms to IP66
- 😤 One relay, 1000 users, standalone
- * Card type: 13.56MHz Mifare Card
- * Working temperature: -40 oC ~ 60 oC (-40 oF ~ 140 oF)
- * Pulse mode, toggle mode
- 😤 Built in LDR for anti tamper







Protection Rating

Anti-tamper

Master Add / Delete Card

The PIX-PCS2-MF is a compact, waterproof stand-alone programmable access control system that provides proximity entry. The product unique feature is simple in design, easy operation, and high reliability.



Waterproof IP66







Built in LDR for anti tamper




PIX-PCS2-MF (STANDALONE MIFARE READER)



User Capacity Card	1000 Mifare Card	
Operating Voltage Idle Current	9~24V DC < 40mA	
Proximity Card Reader Radio Technology Read Range	Mifare 13.56MHz 3~6cm	
Wiring Connections	Relay output, exit button	
Relay Adjustable Relay Output Time Lock Output Load	One (NO, NC, Common) 0-99 Seconds (5 seconds default) 2 Amp Maximum	
Environment Operating Temperature Operating Humidity	Meets IP66 -40 °C ~ 60 °C (-40 °F ~ 140 °F) 20% RH ~ 98% RH	
Physical Colour Dimensions Unit Weight Shipping Weight	ABS Shell White L103L x W48 x H20 (mm) 100g 150g	



Product Size

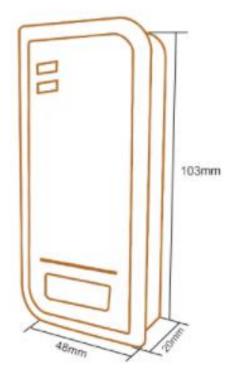



Analog Camera, IP Camera Dome & Bullet Cameras Hidden Cameras 4K Cameras 9TZ Cameras



Panoramic Camera 4K Action Camera | Car Cameras Battery Cameras WiFi Door Bells Hidden Cameras



Fingerprint | Face | Card | Access PIN Reader Electromagnetic Lock Exit Button | Break Glass Video Door Intercom





1013, Geylang East Ave 3, #01-144 Singapore 389728 pixelsconnect@gmail.com | www.pixelsconnect.com.sg | Tel:+65 6440 0023

PIX-PCS2-MF (STANDALONE MIFARE READER)

PIXELS CONNECT PTE. LTD.