

# Wiegand Reader (EM) PIX-PCS2-R EM

\* Waterproof, conforms to IP66


★ Wiegand 26~37 bits output (default: 26bits)

\* Card type: 125KHz EM card

★ Working temperature: -40 oC ~ 60 oC (-40 oF ~ 140 oF)

Reading range: 7 cm







The PIX-PCS2-R (EM) is a slim Wiegand Output Proximity Reader, compatible with 125KHz EM format card. It is fully potted, and can function at extreme temperatures, so it can be mounted either indoor or outdoor.



Waterproof IP66





-40°C Low working temperature







Wiegand 26~37bits(default 26bits)

3 Kinds of Interface



50cm cable (Standard)



RJ45 (optional)




Terminal Blocks (Optional)



Operating Voltage	9~24V DC
Frequency	125KHz
Card Type	EM card
Reading Distance	7 CM
Output Format	Wiegand 26 bits (26~37 bits available upon request)
Operating Temperature	-40 °C ~ 60 °C (-40 °F ~ 140 °F)
Standby Current	< 25mA
Operating Humidity	10%~95% RH
Index of Protection	IP66
Dimensions	L103 x W48 x H19 (mm)



# **Product Size**

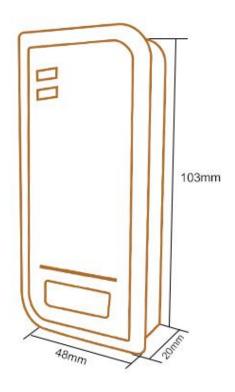





Analog Camera, IP Camer Dome & Bullet Cameras Hidden Cameras 4K Cameras PTZ Cameras



4K Action Camera | Car Camera Battery Cameras WiFi Door Bells Hidden Cameras



Fingerprint | Face | Card | Access PIN Reader Electromagnetic Lock Exit Button | Break Glass



## PIXELS CONNECT PTE LTD

1013, Geylang East Ave 3, #01-144 Singapore 389728 pixelsconnect@gmail.com | www.pixelsconnect.com.sg | Tel:+65 6440 0023