




PIXELS CONNECT PTE LTD

Wiegand Reader (Mifare)
PIX-PCS2-R MF

- * Waterproof, conforms to IP66
- * Wiegand 26~37 bits output (default: 34bits)
- * Card type: 13.56MHz Mifare card
- * Working temperature: -40 oC ~ 60 oC (-40 oF ~ 140 oF)
- * Reading range: 7 cm



The PIX-PCS2-R (MF) is a slim Wiegand Output Proximity Reader, compatible with 13.56MHz Mifare format card. It is fully potted, and can function at extreme temperatures, so it can be mounted either indoor or outdoor.



Waterproof IP66



PIXELS CONNECT PTE LTD



-40°C
Low working temperature



Data 0
Data 1

Wiegand 26~37bits(default 26bits)

3 Kinds of Interface



50cm cable
(Standard)



RJ45
(optional)



Terminal Blocks
(Optional)





PIXELS CONNECT PTE LTD

Operating Voltage	9~24V DC
Frequency	13.56MHz
Card Type	Mifare card
Reading Distance	7 CM
Output Format	Wiegand 34 bits (26~37 bits available upon request)
Operating Temperature	-40 °C ~ 60 °C (-40 °F ~ 140 °F)
Standby Current	< 25mA
Operating Humidity	10%~95% RH
Index of Protection	IP66
Dimensions	L103 x W48 x 20H (mm)
Color	Black, Ivory



PIXELS CONNECT PTE LTD

Product Size

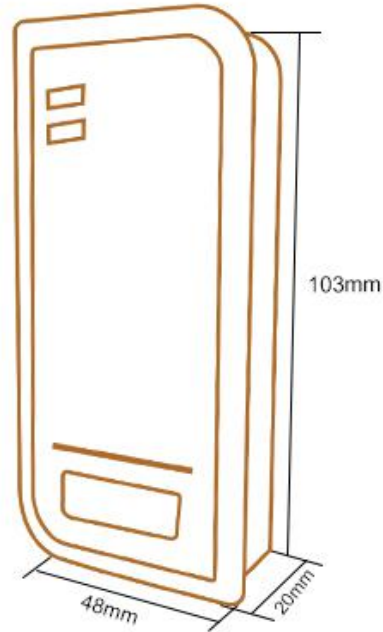

CCTV

Analog Camera, IP Camera
Dome & Bullet Cameras
Hidden Cameras
4K Cameras
PTZ Cameras



**Wireless
Cameras**

Panoramic Camera
4K Action Camera | Car Cameras
Battery Cameras
WiFi Door Bells
Hidden Cameras



**Biometric
Devices**

Fingerprint | Face | Card |
Access PIN Reader
Electromagnetic Lock
Exit Button | Break Glass
Video Door Intercom



PIXELS CONNECT PTE LTD

1013, Geylang East Ave 3, #01-144 Singapore 389728

pixelsconnect@gmail.com | www.pixelsconnect.com.sg | Tel:+65 6440 0023