

Convertible Controller/Reader PIX-PCS2-X

- * Waterproof, conforms to IP66
- * One relay, 1000 users
- Access modes: Card, PIN, Card + PIN, Multi Cards
- Card type: 125KHz EM & Hid card, PIN length: 4~6 digits
- ★ Wiegand 26~37 bits input & output
- User data can be transferred by Wiegand line
- Pulse mode, toggle mode
- 2pcs devices support interlock for two doors









The PIX-PCS2-X is a single door multifunction standalone access controller or a Wiegand output reader. It supports multi access modes, and it has extra features including block enrollment, interlocked...etc.



Waterproof IP66



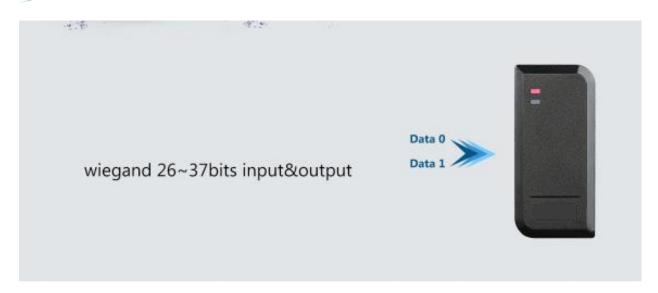



3 working mode: Standalone/Controller/Reader






User Capacity Common User Panic User	1000 998 2
Operating Voltage Idle Current	12~18V DC < 35mA
Proximity Card Reader Radio Technology Read Range	EM&Hid 125KHz Proximity Card 2~6 cm
Wiring Connections	Relay Output, Exit Button
Relay Adjustable Relay Output Time Lock Output Load	One (NO, NC, Common) 0~99 Seconds (5 seconds default) 2 Amp Maximum
Environment Operating Temperature Operating Humidity	Meets IP66 -40 °C ~ 60 °C (-40 °F ~ 140 °F) 0%RH ~ 98%RH
Physical Color Dimensions Unit Weight Shipping Weight	ABS Shell Black (White optional) L103 x W48 x H20 (mm) 125g 185g



Product Size







Analog Camera, IP Cam Dome & Bullet Cameras Hidden Cameras 4K Cameras PTZ Cameras



AK Action Camera | Car Camer Battery Cameras WiFi Door Bells



Fingerprint | Face | Card | Access PIN Reader Electromagnetic Lock Exit Button | Break Glass Video Door Intercom



PIXELS CONNECT PTE LTD

1013, Geylang East Ave 3, #01-144 Singapore 389728 pixelsconnect@gmail.com | www.pixelsconnect.com.sg | Tel:+65 6440 0023