

Metal Standalone EM Reader PIX-PCS5-EM

- * Metal case, anti-vandal
- * Waterproof, conforms to IP66
- * One relay, 2000 users, standalone
- * Card type: 125KHz EM card
- ★ Working temperature: -40 oC ~ 60 oC (-40 oF ~ 140 oF)
- Pulse mode, toggle mode
- * Built in LDR for anti tamper
- * Card block enrolment





The PIX-PCS5-EM is a compact, waterproof stand-alone programmable access control system that provides proximity entry. The product unique feature is simple in design, easy operation, and high reliability.



IP66 Waterproof







Metal Case, Anti-vandal








User Capacity Card	2000 EM Card
Operating Voltage Idle Current	9~24V DC < 40mA
Proximity Card Reader Radio Technology Read Range	EM 125KHz 3~10cm
Wiring Connections	Relay output, exit button
Relay Adjustable Relay Output Time Lock Output Load	One (NO, NC, Common) 0-99 Seconds (5 seconds default) 2 Amp Maximum
Environment Operating Temperature Operating Humidity	Meets IP66 -40 °C ~ 60 °C (-40 °F ~ 140 °F) 20% RH ~ 98% RH
Physical Surface Finish Dimensions Unit Weight Shipping Weight	Zinc Alloy Powder Coat 10.3L x 4.8W x 1.9H (cm) 260g 320g



Product Size

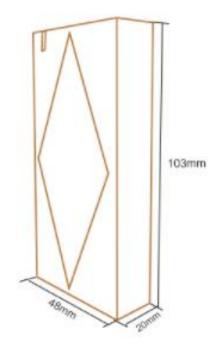





Analog Camera, IP Came Dome & Bullet Cameras Hidden Cameras 4K Cameras PTZ Cameras



4K Action Camera | Car Camer Battery Cameras WiFi Door Bells Hidden Cameras



Fingerprint | Face | Card | Access PIN Reader Electromagnetic Lock Exit Button | Break Glass



PIXELS CONNECT PTE LTD

1013, Geylang East Ave 3, #01-144 Singapore 389728 pixelsconnect@gmail.com | www.pixelsconnect.com.sg | Tel:+65 6440 0023