PIXELS CONNECT PTE LTD

Metal Standalone EM Reader
PIX-PCS6-EM

- Metal case, anti-vandal
- Waterproof, conforms to IP66
- One relay, 2000 users, standalone
- Card type: 125KHz EM card
- Working temperature: -40 oC ~ 60 oC (-40 oF ~ 140 oF)
- Pulse mode, toggle mode
- Built in LDR for anti tamper
- Card block enrolment

The PIX-PCS6-EM is a compact, waterproof stand-alone programmable access control system that provides proximity entry.The product unique feature is simple in design, easy operation, and high reliability.

Waterproof IP66

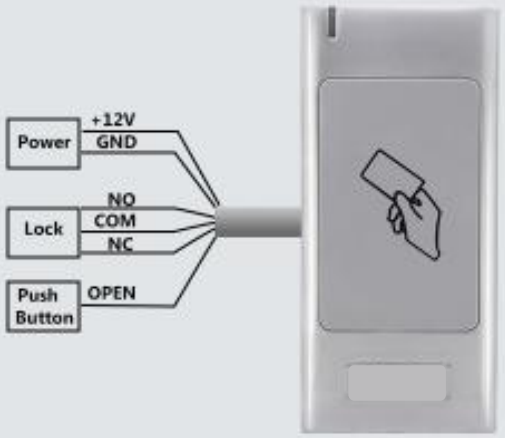

6 wires, easy installing

Metal Case, Anti-vandal

Built in LDR for anti tamper

User Capacity Card	**2000** EM Card
Operating Voltage Idle Current	**9~24V DC** < 40mA
Proximity Card Reader Radio Technology Read Range	**EM** 125KHz 3~10cm
Wiring Connections	Relay output, exit button
Relay Adjustable Relay Output Time Lock Output Load	**One (NO, NC, Common)** 0-99 Seconds (5 seconds default) 2 Amp Maximum
Environment Operating Temperature Operating Humidity	**Meets IP66** -40 °C ~ 60 °C (-40 °F ~ 140 °F) 20% RH ~ 98% RH
Physical Surface Finish Dimensions Unit Weight Shipping Weight	**Zinc Alloy** Powder Coat 10.3L x 4.8W x 1.9H (cm) 260g 320g

Product Size

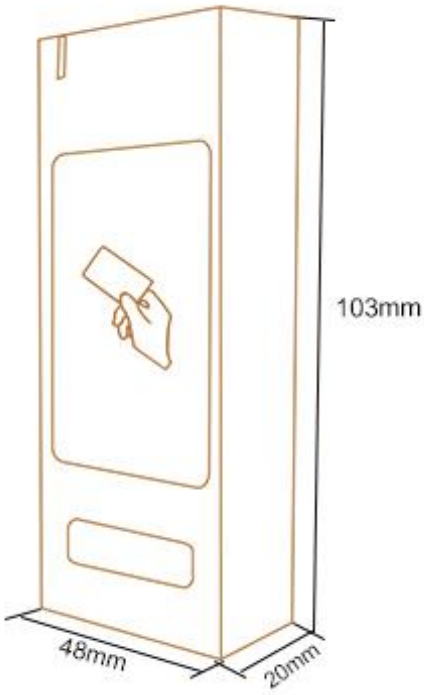

CCTV
Analog Camera, IP Camera
Dome & Bullet Cameras
Hidden Cameras
4K Cameras
PTZ Cameras

Wireless Cameras
Panoramic Camera
4K Action Camera | Car Cameras
Battery Cameras
WiFi Door Bells
Hidden Cameras

Biometric Devices
Fingerprint | Face | Card |
Access PIN Reader
Electromagnetic Lock
Exit Button | Break Glass
Video Door Intercom

PIXELS CONNECT PTE LTD
1013, Geylang East Ave 3, #01-144 Singapore 389728
pixelsconnect@gmail.com | www.pixelsconnect.com.sg | Tel:+65 6440 0023