



PIXELS CONNECT PTE LTD

Metal Standalone EM Reader
PIX-PCS7-EM

- * Metal case, anti-vandal
- * Waterproof, conforms to IP66
- * One relay, 2000 users, standalone
- * Card type: 125KHz EM card
- * Working temperature: -40 oC ~ 60 oC (-40 oF ~ 140 oF)
- * Pulse mode, toggle mode
- * Built in LDR for anti tamper
- * Card block enrollment
- * Mini size: Diameter: 73mm, Thickness: 20mm



The PIX-PCS7-EM is a compact, waterproof stand-alone programmable mini access control system that provides proximity entry. The product unique feature is simple in design, easy operation, and high reliability.



Mini Size: D73mm x H20mm



PIXELS CONNECT PTE LTD

Waterproof, IP66



Metal design, anti-vandal

6 wires, easy installing







PIXELS CONNECT PTE LTD

User Capacity Card	2000 EM Card
Operating Voltage Idle Current	9~24V DC < 40mA
Proximity Card Reader Radio Technology Read Range	EM 125KHz 3~10cm
Wiring Connections	Relay output, exit button
Relay Adjustable Relay Output Time Lock Output Load	One (NO, NC, Common) 0-99 Seconds (5 seconds default) 2 Amp Maximum
Environment Operating Temperature Operating Humidity	Meets IP66 -40 °C ~ 60 °C (-40 °F ~ 140 °F) 20% RH ~ 98% RH
Physical Surface Finish Dimensions Unit Weight Shipping Weight	Zinc Alloy Powder Coat Diameter: 73mm, Thickness: 20mm 180g 260g



PIXELS CONNECT PTE LTD

Product Size

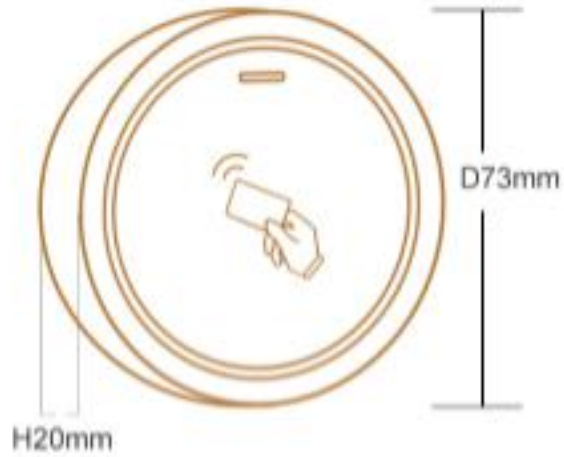

CCTV
Analog Camera, IP Camera
Dome & Bullet Cameras
Hidden Cameras
4K Cameras
PTZ Cameras



**Wireless
Cameras**

Panoramic Camera
4K Action Camera | Car Cameras
Battery Cameras
WiFi Door Bells
Hidden Cameras



**Biometric
Devices**

Fingerprint | Face | Card |
Access PIN Reader
Electromagnetic Lock
Exit Button | Break Glass
Video Door Intercom



PIXELS CONNECT PTE LTD

1013, Geylang East Ave 3, #01-144 Singapore 389728
pixelsconnect@gmail.com | www.pixelsconnect.com.sg | Tel:+65 6440 0023