

PIXELS CONNECT PTE LTD

Convertible Controller/Reader PIX-PCS1-X


- 😤 Waterproof, conforms to IP66
- * One relay, 1000 users
- * Access modes: Card, PIN, Card + PIN, Multi Cards
- * Card type: 125KHz EM & Hid card, PIN length: 4~6 digits
- Wiegand 26~37 bits input & output
- 🖄 User data can be transferred by Wiegand line
- * Pulse mode, toggle mode
- 2pcs devices support interlock for two doors



The PIX-PCS1-X is a single door multifunction standalone access controller or a Wiegand output reader. It supports multi access modes, and it has extra features including block enrollment, interlocked...etc.



Waterproof IP66

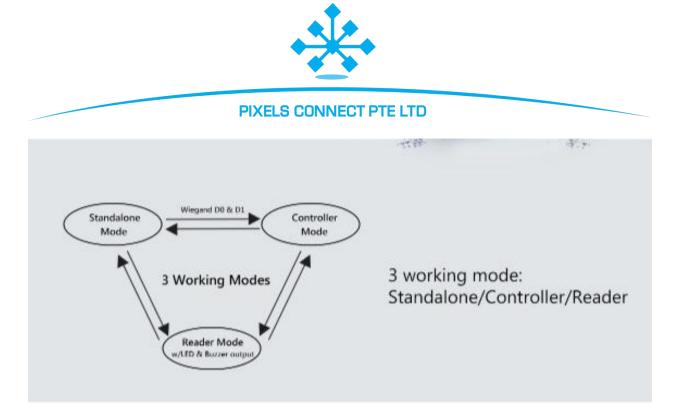

wiegand 26~37bits input&output





PIX-PCS1-X (CONVERTIBLE CONTROLLER/READER)

PIXELS CONNECT PTE. LTD.




PIXELS CONNECT PTE LTD

User Capacity	1000
Common User	998
Panic User	2
Operating Voltage	12~18V DC
Idle Current	< 35mA
Proximity Card Reader	EM&Hid
Radio Technology	125KHz Proximity Card
Read Range	2~6 cm
Wiring Connections	Relay Output, Exit Button
Relay	One (NO, NC, Common)
Adjustable Relay Output Time	0~99 Seconds (5 seconds default)
Lock Output Load	2 Amp Maximum
Environment	Meets IP66
Operating Temperature	-40 °C ~ 60 °C (-40 °F ~ 140 °F)
Operating Humidity	0%RH ~ 98%RH
Physical	ABS Shell
Color	Black (White optional)
Dimensions	L103 x W48x H20 (mm)
Unit Weight	125g
Shipping Weight	185g



PIXELS CONNECT PTE LTD

Product Size





Analog Camera, IP Camera Dome & Builet Cameras Hidden Cameras 4K Cameras PTZ Cameras







Fingerprint | Face | Card | Access PIN Reader Electromagnetic Lock Exit Button | Break Glass Video Door Intercom





1013, Geylang East Ave 3, #01-144 Singapore 389728 pixelsconnect@gmail.com | www.pixelsconnect.com.sg | Tel:+65 6440 0023

PIX-PCS1-X (CONVERTIBLE CONTROLLER/READER)

PIXELS CONNECT PTE. LTD.