



PIXELS CONNECT PTE LTD

Wiegand Reader (EM+HID+MF)

PIX-PCSK2-RX

- ❄️ Waterproof, conforms to IP66
- ❄️ Wiegand 26~37 bits output (default: 26bits)
- ❄️ Programmable Keypad Transmission: 4 bits,8bits or virtual card number format
- ❄️ Card type: Hid card, EM card & Mifare card
- ❄️ Reading range: 3~8cm
- ❄️ External LED Control & External Buzzer Control



The PIX-PCSK2-RX is a Wiegand output keypad, with integrated proximity reader. It can read 125KHz EM & HID cards and 13.56MHz Mifare Cards. Because of waterproof, it can be mounted either indoor or outdoor in harsh environments.





PIXELS CONNECT PTE LTD

Keypad Transmission format: 4bits
(8bits and 10bits virtual card number
can be customized)



3 in 1 Universal Keypad

3 Kinds of Interface



50cm cable
(Standard)



RJ45
(optional)




Terminal Blocks
(Optional)



PIXELS CONNECT PTE LTD

Operating Voltage	9~18V DC
Frequency	125KHz & 13.56MHz
Card Type	125KHz - EM & Hid Card 13.56MHz - Mifare Card (ISO 14443A Compatible)
Keypad Transmissio	4 bits (factory default), 8bits or virtual card number format can be set
Reading Distance	7 CM
Output Format	Wiegand 26~37 bits
Operating Temperature	-40 °C ~ 60 °C (-40 °F ~ 140 °F)
Standby Current	< 25mA
Operating Humidity	10%~95% RH
Index of Protection	IP66
Dimensions	10.2L x 4.8W x 2.0H (cm)
Color	Black, Ivory

Product Size

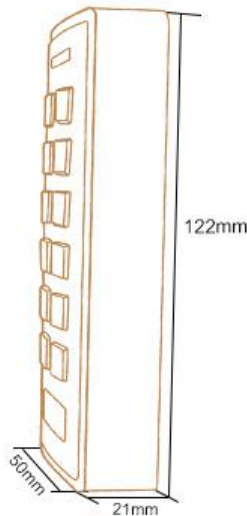

CCTV

Analog Camera, IP Camera
Dome & Bullet Cameras
Hidden Cameras
4K Cameras
PTZ Cameras



**Wireless
Cameras**

Panoramic Camera
4K Action Camera | Car Cameras
Battery Cameras
WiFi Door Bells
Hidden Cameras



**Biometric
Devices**

Fingerprint | Face | Card |
Access PIN Reader
Electromagnetic Lock
Exit Button | Break Glass
Video Door Intercom



PIXELS CONNECT PTE LTD

1013, Geylang East Ave 3, #01-144 Singapore 389728

pixelsconnect@gmail.com | www.pixelsconnect.com.sg | Tel:+65 6440 0023