PIXELS CONNECT PTE LTD

Universal Keypad (EM+HID+MF)
PIX-PCSK5-X

- Waterproof, conforms to IP66
- One relay, 600 users
- Card type: 125KHz EM card,125KHz HID card, and 13.56Mhz Mifare Card
- PIN length: 4~6 digits
- Wiegand 26~37 bits input & output
- Can be used as Wiegand reader with LED & Buzzer output
- Pulse mode, Toggle mode
- 2 devices can be interlocked for 2 doors
- 12~28V AC/ DC

The PIX-PCSK5-X is a universal keypad, can work as standalone keypad, access controller or standard Wiegand output reader. It can read 125KHz EM & HID for Low Frequency and 13.56MHz Mifare for High Frequency tokens, cards and tags.

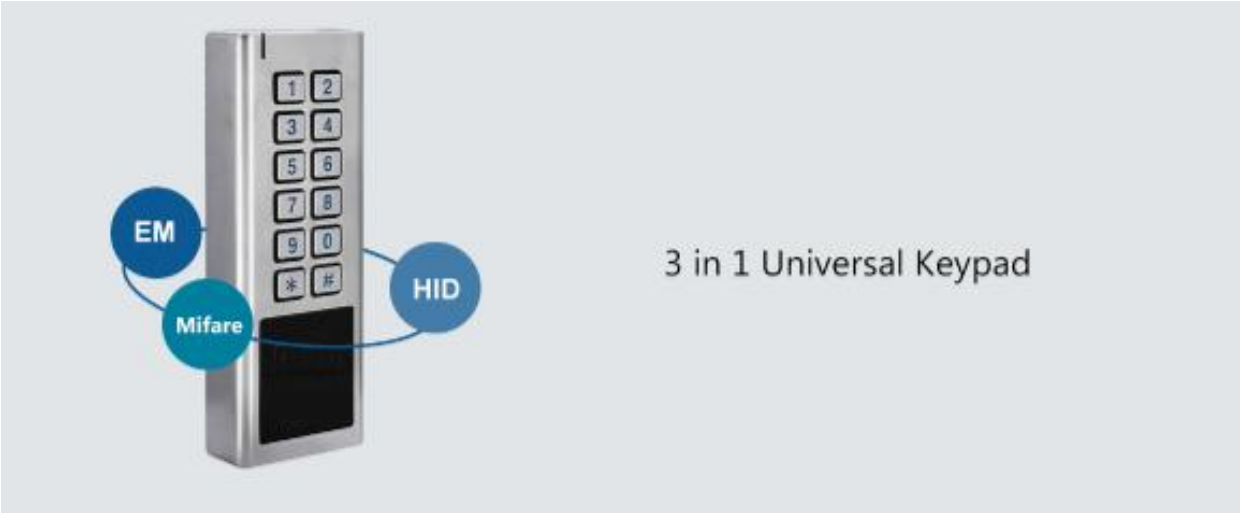

Three working modes-Wiegand
26~37 bits input & output

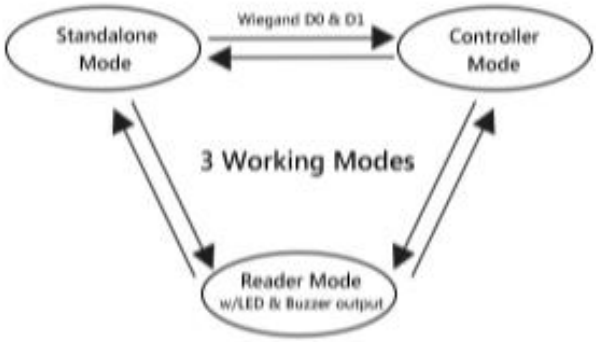

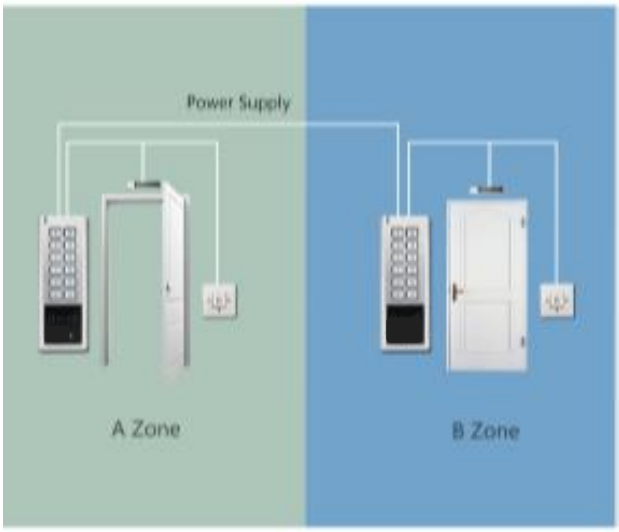

2pcs devices support
interlock for two doors

Wide Voltage Range:

12 ~ 28
VOLTS VOLTS

Manually programmable
wiegand format (default: 26bits)

Three working modes-Wiegand
26~37 bits input & output

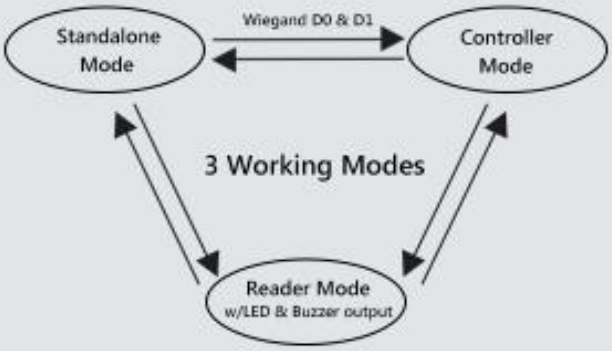

2pcs devices support
interlock for two doors

User Capacity Common Users Panic Users	**600** 598 2
Operating Voltage Idle Current Active Current	**12~28V AC/DC** < 65mA < 100MA
Proximity Card Reader Radio Technology Read Range	**HID & EM & Mifare** 125KHz &13.56Mhz 2~6 cm
Wiring Connections	Relay output, exit button, alarm, door contact, Wiegand input, Wiegand output
Relay Adjustable Relay Output Time Lock Output Load	**One (NO, NC, Common)** 0~99 Seconds (5 seconds default) 2 Amp Maximum
Wiegand Interface Wiegand Input Wiegand Output PIN Output	**Wiegand 26~37bits** 26~37bits 26~37bits 4 bits, 8 bits(ASCII), 10 digits Virtual Number
Environment Operating Temperature Operating Humidity	**Meets IP66** -40 ˚C ~ 60 ˚C (-40 ˚F ~ 140 ˚F) 0%RH ~ 98%RH
Physical Surface Finish Dimensions Unit Weight Shipping Weight	**Zinc-Alloy Enclosure** Powder Coat L148xW56xH22.5mm 500g 600g

Product Size

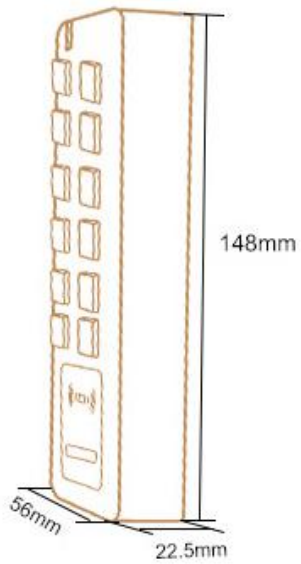

CCTV
Analog Camera, IP Camera
Dome & Bullet Cameras
Hidden Cameras
4K Cameras
PTZ Cameras

Wireless Cameras
Panoramic Camera
4K Action Camera | Car Cameras
Battery Cameras
WiFi Door Bells
Hidden Cameras

Biometric Devices
Fingerprint | Face | Card |
Access PIN Reader
Electromagnetic Lock
Exit Button | Break Glass
Video Door Intercom

PIXELS CONNECT PTE LTD
1013, Geylang East Ave 3, #01-144 Singapore 389728
pixelsconnect@gmail.com | www.pixelsconnect.com.sg | Tel:+65 6440 0023